



# ***Bed Listers & Conditioners***

***Create Ideal Bedding Conditions for Optimal  
Moisture Control and Plant Growth***



A TOUGH ACT TO FOLLOW

BEDDING EQUIPMENT


# ORTHMAN: A TOUGH ACT TO FOLLOW

From the rugged plains in Nebraska comes the finest bedding equipment for the most demanding conditions to match your soils and farming practices. Orthman's 30+ years of experience provide a solid foundation for these products, which have a durably built 7" x 7" toolbar along with a 5" x 7" category 3/3N three-point hitch for long-lasting performance.



# ACCOMPLISH YOUR TILLAGE NEEDS WITH DURABLE AND RELIABLE EQUIPMENT

Feature for feature, Orthman provides the widest variety of time-tested bedding equipment to accomplish your tillage needs with durable and reliable tools.

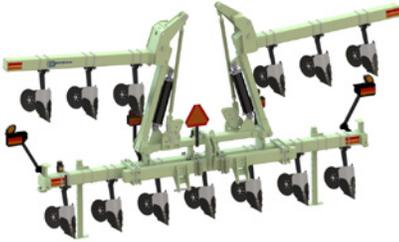

**MODEL 7025 — BED LISTER  
RIGID-MOUNT ROW UNITS  
STACK-FOLDING TOOLBAR**



**MODEL 7050 — BED LISTER  
PARALLEL-LINKAGE ROW UNITS  
STACK-FOLDING TOOLBAR**



**MODEL 7075 — BED LISTER  
RIGID-MOUNT ROW UNIT & REAR ROLLER  
STACK-FOLDING TOOLBAR**

Several of these models are available with the innovative Orthman stack-fold technology that continues to provide the most reliable stacking toolbars on the market. They are designed with precision line-bored wing hinges that offer the greatest strength along with smooth, reliable stack folding for the life of your machine.

Select models are available with vertical-folding toolbars that feature internal hydraulic cylinders for a clean toolbar design and precision line-bored hinges for smooth operation year after year.



**MODEL 7025 — BED LISTER  
VERTICAL-FOLDING TOOLBAR**

All models are equipped with a standard LED lighting package and reflective markings for safer road travel. For storage, all models also include parking stands to keep the implement up and off the ground.



# 7025

## BED LISTER WITH RIGID-MOUNT ROW UNITS

### AN ECONOMICAL BEDDING TOOL WITH PRECISE BED-BUILDING CAPABILITIES

When your soils are mellow and mostly level, the model 7025 Bed Lister provides an economical bedding tool with precise bed-building capabilities. It is available in an 8-row 30" spacing configuration with a rigid toolbar, or as a 12- or 16-row 30" with a vertical-folding toolbar. The innovative stack-folding machines are available with 6-row 60" spacing or 12-row 30" spacing.

The rigid-mount row unit design is securely fastened to the toolbar with heavy-duty U-bolts.

The shear-bolt-protected tail protects the width- and angle-adjustable lister bottom from rocks and other obstructions to ensure a long life. The width is adjustable from 10" to 22" to perform in-row cultivation.

Your bed height, width and slope are all adjustable with smooth-pulling rotary moldboards that have been perfected through decades of in-field research and customer feedback. They feature double bearings for added durability and are mounted on 3/4" steel shafts for longevity.

Accessories include optional base- or wing-mounted gauge wheels for depth control that feature an enclosed adjustment screw for easily matching your tillage needs.



BED LISTER ROW UNIT



MODEL 7025 — 6-ROW 60" STACK-FOLDING TOOLBAR

### SPECIFICATIONS

#### Rigid-Mount 7025 Bed Lister

Horsepower requirements of 15–20 per shank. Specifications provided are for a standard 7025 with bar stands, safety lighting, rigid-mount row units, 1x3 shank, Bed Lister shovel and rear rotary discs.

Rows	Spacing	Toolbar	Hitch	Frame	Row Unit	Trans. Width	Trans. Height	Working Width	Trans. Length	Approx. Weight
6	60"	Single 7x7 5x7 Hitch	CAT 3/3N	Stack Fold	Rigid Mount	19' 11"	10' 8"	32' 9"	3'	4,490 lbs
8	30"	Single 7x7 5x7 Hitch	CAT 3/3N	Rigid	Rigid Mount	22' 1"	4' 2"	22' 1"	3'	2,740 lbs
12	30"	Single 7x7 5x7 Hitch	CAT 3/3N	Vertical Fold	Rigid Mount	18' 6"	6' 10"	31' 11"	3'	4,240 lbs
12	30"	Single 7x7 5x7 Hitch	CAT 3/3N	Stack Fold	Rigid Mount	21' 2"	10' 8"	34'	3' 4"	6,530 lbs
16	30"	Single 7x7 5x7 Hitch	CAT 3/3N	Vertical Fold	Rigid Mount	23' 6"	7' 6"	41' 11"	3' 6"	5,890 lbs

Due to continuing improvements in the design and manufacture of Orthman products, all specifications contained herein are subject to change without notice.

# 7050

## BED LISTER WITH PARALLEL-LINKAGE ROW UNITS

### FLOATING ROW UNITS TAKE YOUR BEDDING OPERATION TO THE NEXT LEVEL

The 7050 Bed Lister with parallel-linkage floating row units takes your bedding operation to the next level with its force-through mounting design and wedge locking system that joins steel to steel to stand up to the rigors of the bedding operation.

The heavy-duty row unit with parallel linkage operates independently of the toolbar for consistent depth control with up to 8 inches of vertical travel for precise bed shaping in uneven field conditions. The tool-free depth control provides up to 9" of quick adjustment with a hand crank and highly visible depth indicators on each row.

The lead 22"-diameter coulters with depth band easily slices through surface and sub-surface residue to clear a path for the 11"-wide lister bottom while simultaneously maintaining precise depth and lateral stability. The standard adjustable scraper keeps the coulters clean for consistent bedding, pass after pass.

The 13 5/8"-diameter rotary moldboards with doubled-up bearings on a 3/4" shaft complete the pass by finishing the raised bed. They are height, width and slope adjustable to shape the bed to your needs.



LEAD DEPTH BAND COULTER



ROW UNIT



# 7050

## BED LISTER WITH PARALLEL-LINKAGE ROW UNITS

### AN ECONOMICAL BEDDING TOOL WITH PRECISE BED-BUILDING CAPABILITIES



BED LISTER — STACK FOLDING



OPTIONAL ROW RUNNER

For improved water infiltration, add the Row Runner double-disk row attachment that creates a grooved channel. It is width and angle adjustable for fine-tuning the valley.

### SPECIFICATIONS

7050 Bed Lister										
Horsepower requirements of 20–30 per row. Specifications provided are for a standard 7050 with bar stands, safety lighting, parallel-linkage row units, 1x3 shank, Bed Lister shovel and rear rotary discs.										
Rows	Spacing	Toolbar	Hitch	Frame	Row Unit	Trans. Width	Trans. Height	Working Width	Trans. Length	Approx. Weight
12	30"	Single 7x7 5x7 Hi-Lift Hitch	CAT 3/3N	Folding	Standard Length	18' 5"	8' 6"	31' 11"	4' 6"	7,780 lbs
12	30"	Single 7x7 5x7 Hi-Lift Hitch	CAT 3/3N	Stack Fold	Standard Length	19' 11"	11' 2"	32' 9"	6'	8,610 lbs
12	36"	Single 7x7 5x7 Hi-Lift Hitch	CAT 3/3N	Folding	Standard Length	21' 11"	8' 6"	38' 6"	4' 6"	8,310 lbs
12	36"	Single 7x7 5x7 Hi-Lift Hitch	CAT 3/3N	Stack Fold	Standard Length	23' 5"	12' 4"	38' 3"	6'	8,930 lbs
12	38"	Single 7x7 5x7 Hi-Lift Hitch	CAT 3/3N	Folding	Standard Length	23' 5"	8' 6"	42' 9"	4' 6"	8,510 lbs
12	38"	Single 7x7 5x7 Hi-Lift Hitch	CAT 3/3N	Stack Fold	Standard Length	24' 9"	12' 4"	40' 8"	6'	9,240 lbs
12	40"	Single 7x7 5x7 Hi-Lift Hitch	CAT 3/3N	Folding	Standard Length	23' 5"	8' 6"	42' 9"	4' 6"	8,510 lbs
12	40"	Single 7x7 5x7 Hi-Lift Hitch	CAT 3/3N	Stack Fold	Standard Length	26' 7"	12' 4"	42' 9"	6'	9,530 lbs
16	30"	Double 7x7	CAT 3/3N	Folding	Standard Length	24' 6"	9' 8"	41' 5"	4' 6"	10,760 lbs
16	30"	Single 7x7 5x7 Hi-Lift Hitch	CAT 3/3N	Stack Fold	Standard Length	26' 7"	12' 4"	42' 9"	6'	11,100 lbs

Due to continuing improvements in the design and manufacture of Orthman products, all specifications contained herein are subject to change without notice.



# 7075

## BED LISTER WITH RIGID-MOUNT ROW UNITS & REAR ROLLER

### SAVE TIME AND MONEY CONSTRUCTING YOUR SEEDBEDS TO PERFECTION


The Orthman Bed Lister Roller offers best-in-class performance with the in-line bored wing hinge design of the stack-folding Orthman technology. It is available in 12-row sizes with 30", 36", 38" or 40" spacings or a 16-row with 30" spacing.

The 11 1/8"-wide lister shovel provides adjustable height and pitch to adapt to different field conditions for creating the drainage or flood irrigation channel you desire.



MODEL 7075

The full-width, heavy-duty 24"-diameter rollers create a firm, level seedbed ideal for planting. The roller is mounted on enormous 2" center shafts with heavy-duty bearings to ensure years of trouble-free service, even in the harshest operating conditions.

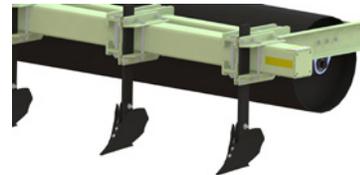

LISTER SHOVEL

The adjustable scrapers keep the rollers free of sticky soil and field residue for a ready-made seedbed.

Tool-free adjustable depth control gauge wheels are mounted on the wings and base for even bedding depth across the machine's width. They feature 9.5-15" 12-ply tires with heavy-duty wheels for long-term performance.



24" DRUM ROLLERS

### SPECIFICATIONS

#### 7075 Bed Lister Roller

Horsepower requirements of 20–25 per row. Specifications provided are for a standard Bed Lister Roller with bar stands, rigid-mount row units, shank, furrowing shovel and trailing rolling drum.

Rows	Spacing	Toolbar	Hitch	Frame	Trans. Width	Trans. Height	Working Width	Trans. Length	Approx. Weight
12	30"	Single 7x7 5x7 Hitch	CAT 3/3N	Stack Fold	20'	10' 4"	32' 10"	6'	9,800 lbs
12	36"	Single 7x7 5x7 Hitch	CAT 3/3N	Stack Fold	25' 2"	11' 2"	40' 4"	6'	11,250 lbs
12	38"	Single 7x7 5x7 Hitch	CAT 3/3N	Stack Fold	25' 2"	11' 2"	40' 4"	6'	11,250 lbs
12	40"	Single 7x7 5x7 Hitch	CAT 3/3N	Stack Fold	26' 7"	12' 4"	41' 10"	6'	11,800 lbs
16	30"	Single 7x7 5x7 Hitch	CAT 3/3N	Stack Fold	26' 7"	12' 4"	41' 10"	6'	11,950 lbs

Due to continuing improvements in the design and manufacture of Orthman products, all specifications contained herein are subject to change without notice.



# 7550

## RAISED BED CONDITIONER

### FOR CROPS RAISED ON BEDS, NOTHING OUTPERFORMS THE 7550

All sizes feature a stack-folding toolbar with in-line bored wing hinges for increased strength and smooth folding. The 7550 is available as a 12- or 16-row machine with 30", 36", 38" or 40" row spacing depending on size.

The lead sweep features both height and pitch adjustability to adapt to differing field conditions to re-form and condition the valleys as you desire.

The full-width spiral chopper reels feature five high-carbon steel blades that maintain a sharp edge for maximum cutting power.

For finishing the pass, choose from double rolling baskets or a five-bar harrow with leveling boards for smoothing the seedbed.

The rear 13"-diameter double rolling baskets feature down pressure adjustment and 10 spiraled blades for consistent conditioning. They are mounted on a walking beam for the smoothest travel through the field.

The rear five-bar spike-tooth harrow option features square spikes that are 10" long by 3/4" wide for maximum leveling. It also has leveling boards that are mounted on height-adjustable leaf springs to match your conditioning needs.

Optional gauge wheels with 9.5Lx15 wheels and tires are easily adjusted by an enclosed height adjustment screw.



STACK-FOLDING TOOLBAR



STACKED BED CONDITIONER

### SPECIFICATIONS

#### 7550 Raised Seed Bed Conditioner

Horsepower requirements of 20–30 per shank. Specifications provided are for a standard Bed Conditioner with bar stands, stacking toolbar, CAT 3/3N hitch, front sweeps, five-blade chopper, and rear rolling baskets or harrow/leveling boards.

Rows	Spacing	Toolbar	Hitch	Frame	Trans. Width	Trans. Height	Working Width	Trans. Length	Conditioning	Approx. Weight
12	36"	Single 7x7 5x7 Hi-Lift Hitch	CAT 3/3N	Stack Fold	22' 6"	11' 4"	37' 7"	7' 5"	Rolling Baskets	10,900 lbs
								10'	Harrow & Level Boards	10,510 lbs
12	38"	Single 7x7 5x7 Hi-Lift Hitch	CAT 3/3N	Stack Fold	23' 2"	11' 7"	39' 8"	7' 5"	Rolling Baskets	11,070 lbs
								10'	Harrow & Level Boards	10,700 lbs
12	40"	Single 7x7 5x7 Hi-Lift Hitch	CAT 3/3N	Stack Fold	23' 2"	11' 7"	39' 8"	7' 5"	Rolling Baskets	11,070 lbs
								10'	Harrow & Level Boards	10,700 lbs
16	30"	Single 7x7 5x7 Hi-Lift Hitch	CAT 3/3N	Stack Fold	23' 2"	11' 7"	39' 8"	7' 5"	Rolling Baskets	11,380 lbs
								10'	Harrow & Level Boards	10,960 lbs

Due to continuing improvements in the design and manufacture of Orthman products, all specifications contained herein are subject to change without notice.

▶ **CONTACT YOUR LOCAL DEALER FOR MORE INFORMATION REGARDING THE ORTHMAN BEDDING TOOLS TO MEET YOUR OPERATION'S NEEDS.**

**Unverferth**  
Manufacturing Company, Inc.

©™ Trademarks, registered or applied for, of Unverferth Mfg. Co., Inc.

Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Texas, Washington, Ontario and Saskatchewan, Canada

P.O. Box 357 | Kalida, OH 45853 | 419-532-3121  
Unverferth.com

© 2024 Unverferth Manufacturing Co., Inc. Printed in USA  
OBP42510105M2