



**THE TRUSTED NAME
— IN THE FIELD —**

SEED
Chariot[®]



SAVING YOU TIME AND LABOR AT PLANTING!

The Seed Chariot[®] seed tenders combine high-speed delivery with operator-friendly controls for unmatched seed-planting efficiency.



**PARKER SEED CHARIOT[®] MODELS 2620, 3620, 3620R SEED TENDERS
1020 BULK BOX CARRIER**



MODELS 2620, 3620 AND 3620R SEED TENDERS

UNMATCHED SEED-PLANTING EFFICIENCY

More and more growers are discovering the time-saving benefits of delivering seed in bulk to the field. This is made even easier with the unmatched convenience of the Seed Chariot® models 2620, 3620 and 3620R.

Seed Chariot models 2620 and 3620 feature an 18' conveyor and dual-compartment hoppers with 260- and 360-unit seed capacities, respectively. Model 3620R features a 21' conveyor for loading the tallest planters and drills and has dual-compartment bins with a 360-unit seed capacity. The steep-sloped sidewalls ensure fast and complete unloading.

CONVEYOR

- Conveyor features a 6" tube with an 8" cleated belt or a larger 8" tube with a 12" cleated belt (optional on models 3620 and standard on 3620R) to gently carry seed at speeds up to 12 or 25 bushels per minute, respectively
- Brush and patented side seals on the conveyor inlet minimize seed damage by preventing seed from backfeeding
- The 6" conveyors are powered by a 5.5 hp/160cc and the 8" by a 9 hp/270cc (8" conveyor) industrial-grade gas engine with electric start and centrifugal clutch direct-drive system for quickest response
- 180° conveyor swing with winch-controlled height adjustment for unloading ease

- Hinged/removable bottom door for complete cleanout
- Conveyor locks into position at either front or back while in the field

UNDERCARRIAGE AND TRANSPORT

- Undercarriage offers rubber-cushioned suspension, triple axles and electric brakes on models 3620 and 3620R; tandem dual axles and electric brakes on model 2620
- Standard highway-rated tires, LED lights, reflectors, ball hitch and transport chain

18'
Model
2620,
3620



THE TRUSTED NAME
— IN THE FIELD —

CONTROLS AND CONVENIENCE

- Regulate unloading speed by simply adjusting engine speed
- Easy-opening slide doors with a rubber funnel that regulates seed flow into the intake and prevents overflow
- Dual viewing windows to easily monitor contents during loading and unloading
- Easy-to-operate wired hand controller with strong magnet for easy and convenient storage



Available with gooseneck hitch



Standard 18-ounce Weatherguard roll-over tarp protects contents from weather and stays tightly locked, even at highway speeds

OPTIONS

- Electronic scale package with large screen for easy viewing and 4-point load bars for the greatest accuracy
- Spare tire package
- 10' three-stage telescopic downspout for additional reach and filling convenience
- 4' flexible downspout for easily filling central-fill planters and drills
- Electric lift/lower
- Two-function wireless remote for controlling unloading that raises/lowers conveyor with electric raise/lower
- Gooseneck hitch
- Pintle or clevis hitch attachment for pull-type undercarriage



Winch-operated vertical height adjustment allows for easy filling of different planter types





The 18' steel tube with 5' telescoping downspout can reach up to 30' and the 21' conveyor up to 36'

21'
Model
3620R



MODELS 2620, 3620, 3620R BULK SEED TENDERS

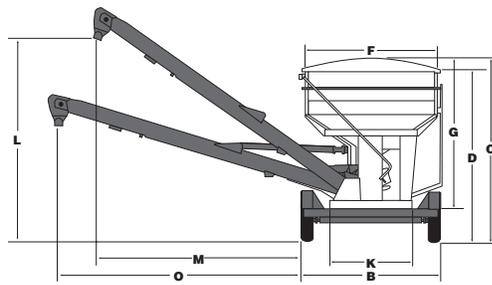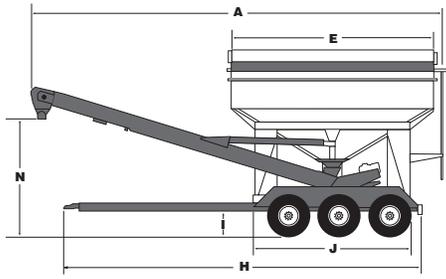

Scale package with auto-unload feature

SEED CHARIOT BULK SEED TENDER SPECIFICATIONS

DESCRIPTION		MODEL 2620	MODEL 3620	MODEL 3620R	
A	Overall Length	With Bumper Hitch	23' 5"	24' 5"	27' 6"
		With Gooseneck Hitch	10' 4"	10' 11"	10' 11"
B	Overall Width Transport	24' 6"	25' 6"	27' 6"	
C	Overall Height Transport	8' 6"	8' 6"	8' 6"	
D	Overall Load Height	9' 3"	10' 3"	10' 3"	
E	Box Length	12'	12'	12'	
F	Box Width	8'	8'	8'	
G	Box Height	8' 1"	9' 1"	9' 1"	
H	Box Load Height	7' 5"	8' 5"	8' 5"	
I	Box Base Length	9' 4"	9' 4"	9' 4"	
J	Box Base Width	5'	5'	5'	
K	Undercarriage Length	18' 5"	21'	21'	
L	Overall Length Past the Hitch	20' 5"	22' 6"	22' 6"	
M	Undercarriage Deck Height	1' 10"	1' 10"	1' 10"	
N	Undercarriage Underframe Clearance	1' 2"	1' 2"	1' 2"	
O	Conveyor Height in Transport Position	6' 10"	6' 10"	7' 6"	
P	Conveyor Maximum Unload Height	12' 6"	12' 6"	13' 8"	
Q	Conveyor Reach at Maximum Unload Height	12' 5"	12' 5"	15'	
R	Conveyor Minimum Unload Height	6' 10"	6' 10"	8'	
S	Conveyor Reach at Minimum Unload Height	14' 8"	14' 8"	17' 8"	
—	Approximate Empty Weight	4,720 lbs.	5,610 lbs.	5,720 lbs.	
—	Loaded Tongue Weight	1,000 lbs.	1,000 lbs.	1,050 lbs.	
—	Lighting Connector	7-pin flat	7-pin flat	7-pin flat	
Base Length — Less Undercarriage		9' 5"	9' 5"	9' 5"	
Base Width — Less Undercarriage		5' 1"	5' 1"	5' 1"	
Overall Height — Less Undercarriage		7' 6"	8' 6"	8' 6"	



Optional T&G Applicator

Mounts to conveyor intake for adding talc and other seed-fluency agents
 On/off control synced with conveyor for consistent application amounts
 Internal agitator keeps talc flowing
 Flow control valve for easy rate adjustability

MODEL 1020 BULK BOX CARRIER

Like the bulk seed tender, the Seed Chariot model 1020 bulk box carrier provides growers the advantages of cost-effective time and labor efficiency by delivering bulk seed directly to the field to your planter or drill. The model 1020 comes equipped with an unloading conveyor and features a capacity of approximately 100 seed units. An easy-opening 5" x 6" door with a rubber funnel regulates seed flow into the intake.

CONVEYOR

- The 8" cupped and cleated belt inside the 6" steel tube gently carries seed at speeds up to 12 bushels per minute
- Brush and patented side seals on the conveyor inlet minimize seed damage by preventing seed from backfeeding
 - Standard on/off wired remote with magnetic mount for convenient placement on the conveyor
 - 18' steel tube with 4'-6' telescoping downspout can reach up to 30'
 - Hinged bottom door on conveyor allows for easy and complete cleanout
 - The conveyor locks into storage position at either the front or back of the carrier during field operation

UNDERCARRIAGE

- Undercarriage features rubber-cushioned suspension, tandem axles with electric brakes, and highway-rated tires, LED lights and reflectors
- A two-part urethane enamel finish and silicone-sealed seams for a long-lasting finish on the carrier body; undercarriage, conveyor and other parts are powder-coated to resist corrosion

ACCESSORIES

- 10' three-stage telescopic downspout for up to 40' reach (16-row planter)
- Spare tire
- Electric raise/lower for more than 4' of conveyor height adjustment
- Canvas hopper cover



Dual unloading chutes feed the intake from a central point for greater unloading efficiency. Protective lids cover unloading chutes when not in use to keep out moisture and debris



Scale for verifying seed delivered/loaded is enclosed in weathertight box

T&G APPLICATOR WITH 50-LB. CAPACITY

- Mounts to conveyor intake for talc and/or graphite application
- On/off control synced with conveyor
- Internal agitator keeps talc flowing
- Flow control valve for easy rate adjustment



Heavy-duty jack, 2 5/16" ball hitch for easy hitching and transport chains



Seed Chariot model 1020 bulk box carrier is powered by a 5.5 hp/160 cc industrial-grade gas engine with electric start



Unloading speed is regulated by engine speed

Conveyor base features rollers that pivot a full 180° and can be locked into place for unloading

Pivot track features bolt-on stainless steel wear plates for longer life

SEED CHARIOT BULK BOX CARRIER SPECIFICATIONS

DESCRIPTION		MODEL 1020
	Approximate Empty Weight (lbs.)	3,300
	Loaded Tongue Weight (lbs.)	700
	Hitch Type Standard/Optional	2 5/16" ball/3" pintle
	Lighting Connector	7-pin flat
	Standard Downspout Reach (2-stage)	30' (12-row planter)
	Standard Downspout Reach (3-stage)	40' (16-row planter)
A	Overall Length With Bumper Hitch	20' 6"
B	Overall Width	8' 6"
C	Overall Height	5' 6"
D	Overall Load Height	10' 9"
E	Platform Length	8' 2"
F	Undercarriage Length	17'
G	Overall Length Past the Hitch	3' 6"
H	Undercarriage Deck Height	1' 10"
I	Undercarriage Underframe Clearance	1' 1"
CONVEYOR/AUGER SPECIFICATIONS		
J	Spout Transport Height	8' 8"
K	Overall Transport Height	10' 9"
L	Optional Unload Height (with electric lift)	11' 2"
M	Optional Unload Reach (with electric lift)	12'
N	Standard Unload Height	10' 2"
O	Standard Unload Reach	13'

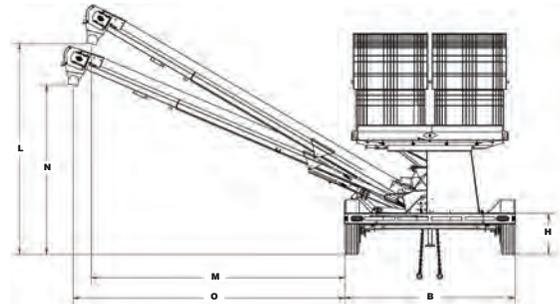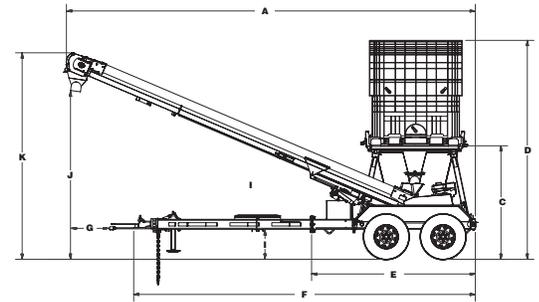

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice. For relevant patent marking, please visit Unverferth.com/patents.

SEE FOR YOURSELF!

Stop by your nearest Parker dealer today and see for yourself all the features and benefits of the Seed Chariot models 2620, 3620 and 3620R bulk seed transports and the Seed Chariot model 1020 bulk box carrier.

GET A PARTNER YOU CAN TRUST FOR THE BUSY PLANTING SEASON.

SEE YOUR NEAREST PARKER DEALER OR VISIT PARKEREQUIP.COM.

PSC5251205M2

Unverferth
Manufacturing Company, Inc.

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice. For relevant patent marking, please visit Unverferth.com/patents.

UNVERFERTH MFG. CO., INC.
P.O. BOX 357, KALIDA, OH 45853, USA • UNVERFERTH.COM • 419.532.3121

© 2025 Unverferth Manufacturing Co., Inc.
®, ™ Trademarks, registered or applied for, of their respective owners
Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Texas, Washington, and Ontario and Saskatchewan, Canada