


PORTABLE Tube Conveyors

MOVE IT FAST! ...and Gentle

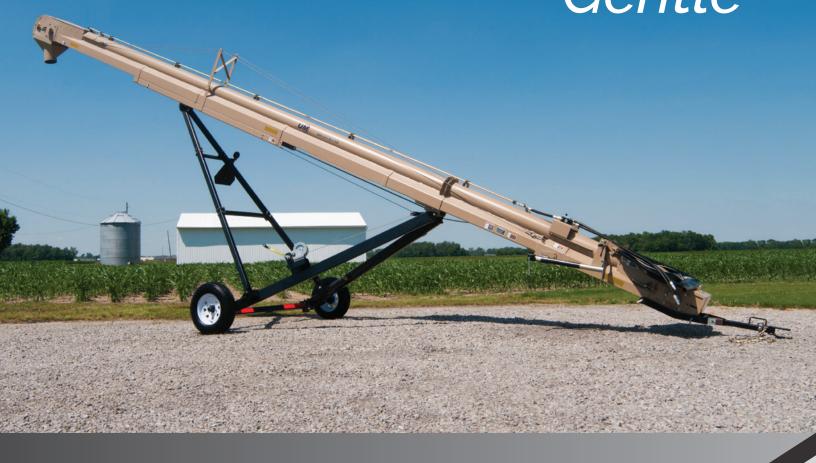

It's belt capacity, not speed, that makes moving seed, grain or feed with an Unverferth pull-type tube-style conveyor both fast and gentle. The conveyor is designed from the ground up to provide high-capacity movement at steeper angles and lower belt speed for the most gentle seed handling.

21', 25' and 30'


umequip.com



Unverferth® **BULK SEED HANDLING**

TUBULAR CONVEYORS MOVE IT FAST! ... and gentle.

- 8" diameter conveyor tube constructed of heavy-duty,
 10-gauge powder-coated steel for greater durability
- 21' model features PVC conveyor belt with 2" tall in-line cleats and industry-proven design that moves material up to 25 bushels per minute
- 30' and 35' models feature a patented cupped and cleated 12"-wide rubber belt inside 8" tube provides enhanced carrying capacity of up to 35 bushels per minute
- Patented intake provides double brush seals to eliminate back feeding of seed for minimizing seed damage
- Top-mounted motor keeps belt evenly tensioned at the intake for the gentlest seed handling
- Choose from orbital hydraulic motor or electric drive with single- or three-phase motor
- Hydraulic operating speed is fully adjustable from 0 to 500 rpm for optimum material movement
- Friction-disc winch for easy height adjustment
- · Extra-wide 3' canvas hopper for unloading convenience
- Standard protective grating over hopper intake for enhanced operator safety
- Hinged cleanout door for easily removing leftover seed
- Hopper design is ideal for unloading bulk seed containers, yet flexible enough to also work easily with wagons or bins









FEATURES

- Conveyor discharge spout features rubber linedhood for the gentlest seed handling
- Heavy-duty tubular steel transport frame with new 15" wheels and tires with 5-bolt hubs
- Wide, 8' wheelbase for extra stability in high working position and during towing
- Standard transport chain for safer road transport
- Well-balanced design and tool-free hitch removal for easy positioning and convenient operation









OPTIONS

- Telescopic downspout options in either 3-stage 10' or 2-stage 6' length
- 4' flexible neoprene spout
- Canvas cover protects hopper contents while in transport or storage
- Light kit for safer road travel
- Power-Pack unit with electric-starting Honda 11 HP engine and mounting kit for self-contained hydraulic operation of 21' conveyors



Unverferth Pull-Type Tube Conveyor Specifications

Model	Transport height	Transport length	Maximum discharge height	Minimum discharge height	Maximum overall height	Minimum overall height	Reach at maximum height	Reach at minimum height	Average unloading rate at 30° incline	Appx. weight (lbs.)
21'	9'11"	24'11"	13'	8'3"	15'6"	10'9"	3'4"	5'5"	1,500 bph	1,060
30'	11'1"	35'	21'9"	6'11"	24'8"	11'5"	6'6"	11'3"	2,040 bph	2,030
35'	11'9"	39'10"	24'3"	9'4"	26'10"	12'	10'3"	14'	2,040 bph	2,325

For complete details on moving seed and grain both **FAST** ... and gentle ... with an Unverferth pull-type tube-style conveyor, see your Unverferth dealer today or check our website at www.umequip.com.

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice. For relevant patent marking, please visit unverferth.com/patents.







