



60-SERIES MODELS

UNVERFERTH SEED RUNNER SEED TENDERS

New!



NEXT LEVEL OPERATIONAL EFFICIENCY WITH **FULLY-LOADED PERFORMANCE.**

The all-new Unverferth 60-Series Seed Runner bulk seed tender brings operational efficiency to the next level and is packed with new standard features for fully-loaded performance. The new CAN bus communication system, combined with a new Honda® engine, controls all operations of the seed tender electronically for the smoothest running power pack and faster hydraulic response times. This new system improves operational efficiency of the power pack by up to 85%, which translates to better fuel efficiency and the ability to run multiple hydraulic functions at the same time with seamless precision. In addition, new standard features on the 60-Series include an auto-tension belt conveyor system, hopper access doors for easy cleanout, engine auto-throttle, LED work lights, a newly designed 5-function wireless remote and a new DG3520 scale package on XL- and DXL-models. Ready to stand out in the crowd? The all-new Midnight Edition seed tender is available for the XL- and DXL-models with midnight metallic gray paint scheme, aluminum wheels and upgraded standard features. The Unverferth Seed Runner seed tender has been leading the way for nearly 20 years with its patented self-filling conveyor system that revolutionized how bulk seed is delivered to planters in the field. The 60-Series continues this tradition and brings operational efficiency to a whole new level with the smoothest performance and more standard features.

**INNOVATING
THE FUTURE OF
AGRICULTURE**

SEED HANDLING

60-SERIES MODELS

60-SERIES SEED RUNNER

HOPPER CONSTRUCTION

- Models 4960DXL, 3960DXL & XL, 3760XL & 3760 and 2760XL & 2760 feature a dual-compartment hopper with capacities of 500, 400, 375 and 275 seed units.
- All models feature upper and lower viewing windows in the hopper, constant-tension roll-tarp and steep-sloped side walls with graphite-coated interior.
- **NEW** hopper access doors allow the operator to easily reach inside for complete clean out at the end of the season.

CONVEYOR DESIGN

- All conveyor lengths are measured from the top bearing to the bottom bearing for a true measurement of reach - DXL-models feature a 24' long conveyor, XL-models utilize a 21' conveyor and models 3760 and 2760 feature an 18' long conveyor.
 - Choice of 10" (45 bu./min.), 8" (35 bu./min.) or 6" (16 bu./min.) conveyor size depending on model.
- The patented self-filling conveyor design features an exclusively designed rubber belt with offset rows of U-shaped cleats for maximum unloading efficiency.
 - Conveyor spring-lift assist allows the operator to easily rotate the conveyor 180° for quick self-filling from the ground level.
 - The **NEW** auto-tension conveyor features a spring-loaded system that applies consistent tension on the belt for reduced maintenance requirements.
 - Each U-shaped cleat is molded into the backbone of the patented rubber conveyor belt, eliminating the risk of glued-on cleats breaking off and getting into the planter.



AUTO-TENSION CONVEYOR

WIRELESS REMOTE

- **NEW** 5-function wireless remote is standard on all models and controls the conveyor on/off, conveyor raise/lower, opens/closes the hopper doors, starts/stops the engine and controls the engine throttle.
 - The remote can adjust conveyor speed, operate the **NEW** standard LED work lights and has a weight readout when equipped with a scale.
 - The remote can operate numerous optional accessories, including the talc & graphite applicator, hydraulic jack, the **NEW** hydraulic tarp and tank shaker kit.
 - **NEW** auto-throttle system adapts to the engine load for various functions and automatically increases or decreases the throttle.




5-FUNCTION WIRELESS REMOTE

UNDERCARRIAGE SYSTEM

- Model 4960DXL features heavy-duty 16,000 lb. tandem axles with 17.5" budd-style dual tires, oil bath hubs, patented rubber-cushioned suspension and shock absorbers.
- Models 3960DXL and 3960XL feature heavy-duty 12,000 lb. tandem axles with 17.5" tires, oil bath hubs, patented rubber-cushioned suspension and shock absorbers.
- Models 3760XL and 3760 (triple axle) and 2760XL and 2760 (tandem axle) feature 7,000 lb. torsion axles with 16" tires.
- Depending on model, choose from a bumper-pull or gooseneck hitch design and all models feature electric brakes on all axles.



HOPPER ACCESS DOORS

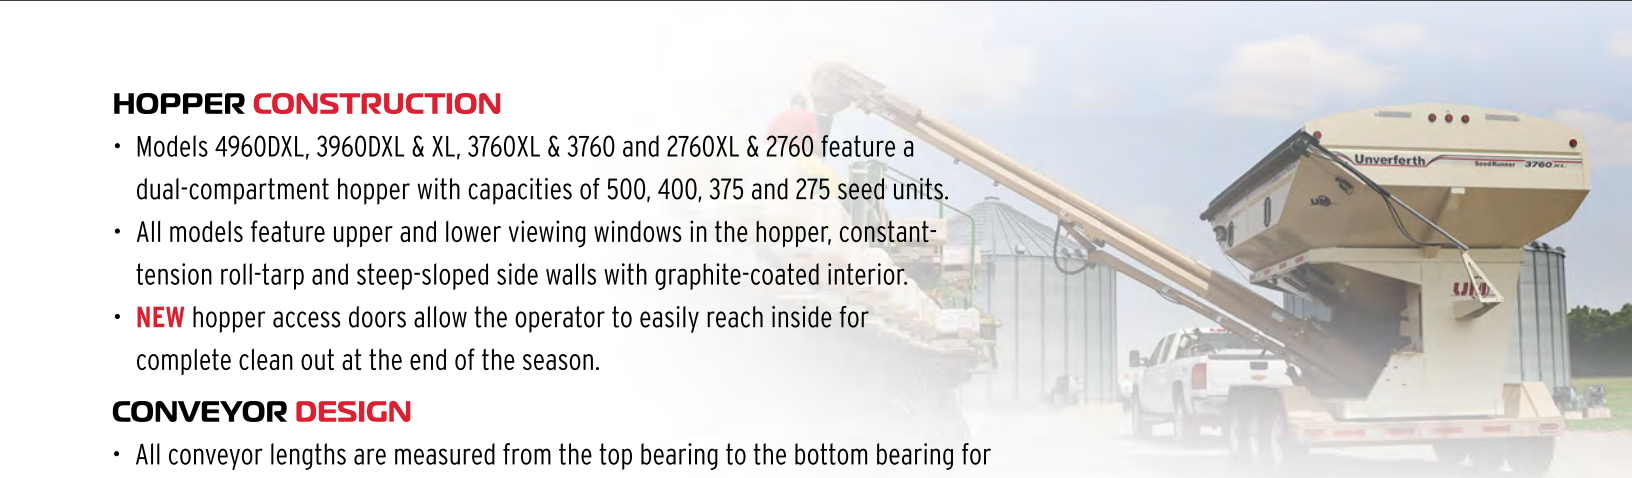

STANDARD FEATURES

DG3520 SCALE

- The **NEW** DG3520 scale system is standard on XL- and DXL-models (optional on 3760 and 2760) and features a split screen design, automatic conveyor shutoff to unload a programmed weight of seed, field calc function and features Bluetooth connectivity which allows the user to run limited wireless remote functions from a mobile device in the event of a lost remote.



POWER PACK

- **NEW** electronically carbureted Honda® engine features simple operation and ensures the smoothest, most consistent performance.
 - Re-designed hydraulic valve system improves efficiency by up to 85% and provides faster hydraulic response times. These efficiency increases allow the operator to perform multiple hydraulic functions at once, such as raising and swinging the conveyor at the same time (6- or 7-function remote option required).
 - The power pack features a **NEW** automated cold start that relieves the load on the engine for easier starting in cold temperatures.
 - The new electronically controlled engine combined with updates to the hydraulic system result in more than a 15% increase in fuel efficiency for longer run times.



MIDNIGHT EDITION

The **NEW** limited Midnight Edition Seed Runner seed tender is available for XL- and DXL-models and features a midnight metallic gray paint scheme, specialized decal package and aluminum wheels for a sleek appearance. All Midnight Edition seed tenders are packed with the same standard features as all other 60-Series seed tenders, but also include the following as standard:

- 6-Function wireless remote controls conveyor on/off, raise/lower, swing left/right and opens/closes the hopper doors. In addition, the remote controls the engine start/stop and throttle.
- T&G Applicator is tied in with the conveyor hydraulics for consistent application of talc or graphite.
- Hydraulic Jack permits quick and easy raising and lowering for convenient operation.
- Electric Tank Shaker kit assists with the flow of treated seed for complete cleanout.
- **NEW** Hydraulic Roll-Tarp operation runs off the seed tender's engine and is controlled from the wireless remote.
- Deluxe ladder system is 20" wide, features gas strut lift-assist and extends away from the seed tender.



OPTIONS & SPECIFICATIONS

- Options for the new 60-Series Seed Runner seed tender include a 6- or 7-function wireless remote, DG3520 scale for models 3760 and 2760, remote scale display, talc and graphite applicator, hand wash tank, hydraulic jack, electric tank shaker kit, **NEW** hydraulic-operated roll-tarp, 19.5" wheels and tires on 3960 models, spare tire and aluminum wheels for 375 and 275 seed unit sizes to name a few.



TALC & GRAPHITE APPLICATOR



HAND WASH TANK



HYDRAULIC-OPERATED ROLL-TARP

SPECIFICATIONS							
	4960DXL	3960DXL	3960XL	3760XL	3760	2760XL	2760
Capacity (seed units)	500	400	400	375	375	275	275
Conveyor Length	24'	24'	21'	21'	18'	21'	18'
Overall Length - Bumper	-	31'	27'10"	27'10"	24'8"	26'11"	23'8"
Overall Length - Gooseneck	32'	31'	27'10"	27'10"	25'9"	26'11"	24'8"
Transport Width	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"
Transport Height	11'11"	11'3"	11'3"	10'8"	10'8"	10'3"	10'3"
Load Height	11'	10'6"	10'6"	10'	10'	9'6"	9'6"
Hopper Length (Less undercarriage)	16'8"	14'	14'	14'	14'	12'	12'
Hopper Width (Less undercarriage)	8'6"	8'6"	8'6"	8'6"	8'6"	8'	8'
Hopper Height (Less undercarriage)	9'6"	9'1"	9'1"	8'11"	8'11"	8'5"	8'5"
Hopper Load Height (Less undercarriage)	8'8"	8'4"	8'4"	8'2"	8'2"	7'8"	7'8"
Hopper Base Length (Less undercarriage)	11'	9'5"	9'5"	9'5"	9'5"	9'5"	9'5"
Hopper Base Width (Less undercarriage)	4'8"	5'	5'	5'	5'	5'	5'
Length (Hitch to back of hopper)	28'8"	24'3"	24'3"	22'6"	22'6"	22'6"	22'6"
Undercarriage Deck Height	2'4"	2'3"	2'3"	1'10"	1'10"	1'10"	1'10"
Undercarriage Under Frame Clearance	11"	1'	1'	12"	12"	12"	12"
Conveyor Height in Transport Position	8'2"	8'9"	7'10"	7'10"	7'6"	7'10"	7'6"
Conveyor Max Unload Height	15'11"	15'7"	13'6"	13'6"	12'	13'6"	12'
Conveyor Min Unload Height	8'6"	8'8"	7'10"	7'10"	7'	7'10"	7'
Conveyor Max Side Reach	19'3"	19'8"	16'6"	16'6"	13'5"	16'6"	13'5"
Conveyor Min Side Reach	15'11"	16'10"	14'2"	14'2"	11'2"	14'2"	11'2"
Approx. Empty Weight (lbs.)	11,000	7,300	7,150	6,820	6,750	6,040	6,000
Loaded Tongue Weight (lbs.)	6,700	2,100	1,900	1,000	1,000	1,000	1,000
Lighting Connector	7-Pin Flat						
Height - Less Undercarriage	10'2"	9'1"	9'1"	8'11"	8'11"	8'5"	8'5"

Due to continuing improvements in the design and manufacture of Unverferth Mfg. products, all specifications contained herein are subject to change without notice.

STREAMLINE YOUR SEED OPERATION.

➔ Visit UMequip.com or see your nearest seed handling dealer for more information.

For relevant patent marking, please visit unverferth.com/patents. Additional patent(s) are pending.

Unverferth
Manufacturing Company, Inc.

UNVERFERTH MFG. CO., INC.
P.O. BOX 357, KALIDA, OH 45853, USA • UNVERFERTH.COM • 800.419.4335

© 2026 Unverferth Manufacturing Co., Inc.
®™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH
Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Texas, Washington and Ontario and Saskatchewan, Canada

UMSR602606MA1