

**Unverferth**® Tillage

*Tremor*® subsoiler



# **Create An Aftershock** *In Your Hardpan*

*Subsoilers need to be tough, durable, aggressive and leave a lasting impact. That's exactly what you get with the Tremor® subsoiler from Unverferth.*

*Models 730 and 710*

## Create An Aftershock In Your Hardpan

*Tremor shanks and coulters are built to deliver optimum performance in the heaviest residue and most difficult soil conditions. Shanks are specifically designed for maximum soil disturbance throughout the soil profile by ripping through the heaviest compaction to shake, shatter and break hardpan up to 24" deep. Parabolic auto-reset shanks feature 6,000 lbs. of trip pressure. Shear-bolt protected shanks with 7,500 lbs. of shear pressure are also available.*

- Parabolic-shaped shanks for maximum soil disturbance and reduced horsepower requirement
- Up to 24" working depth
- 1¼"-wide, heat-treated, high-stress steel shanks
- Triangular-shaped, forged wearbars for long shank life
- 2½" wide x 12" long forged, replaceable shank points
- Auto-reset shank design allows shank to trip rearward and upward without use of shear bolts; 6,000 lbs. of trip pressure for consistent working depth
- Economical shear-bolt protected shanks available with 7,500 lbs. of shear pressure
- Swivel coulters with 20" rippled blade cuts residue ahead of shank for optimum trash flow
- Welded, heavy-duty double frame construction with 6"x6" rear bar for increased strength and durability
- Innovative frame design with standard 30" row spacing; adjustable to a variety of common row widths from 20" to 40" with bolt-on frame extensions
- 35" underframe clearance
- Gauge wheels with new 7.6L x 15 8-ply tires standard on rigid units; 9.5L x 15 8-ply tires standard on folding units
- Standard unit fits Category II quick hitch; Category III standard, quick and narrow-quick hitch
- Choice of tractor red or green high-quality powder-coat finish



*Adjustable row spacings from 20" to 40"*



*Parabolic-shaped shanks*



## Options:

- Rolling finisher attachment available for additional finishing and thorough leveling of soil (photo)
- Shank stagger kit for positioning shank 16" rearward for reducing hp requirement and increasing residue flow (photo)
- Chromium-capped and winged shank points for optimum soil shattering and point durability
- Covering boards for additional soil and residue mixing
- Transport light kit for safer road travel; kits meet current A.S.A.E. standards
- Pull-type conversion fits 5- to 8-shank rigid models for converting 3-point hitch to pull-type




*Rolling finisher attachment*



*Soil worked with rolling finisher attachment*

*Shank stagger kit for positioning shanks 16" rearward for increased residue flow*

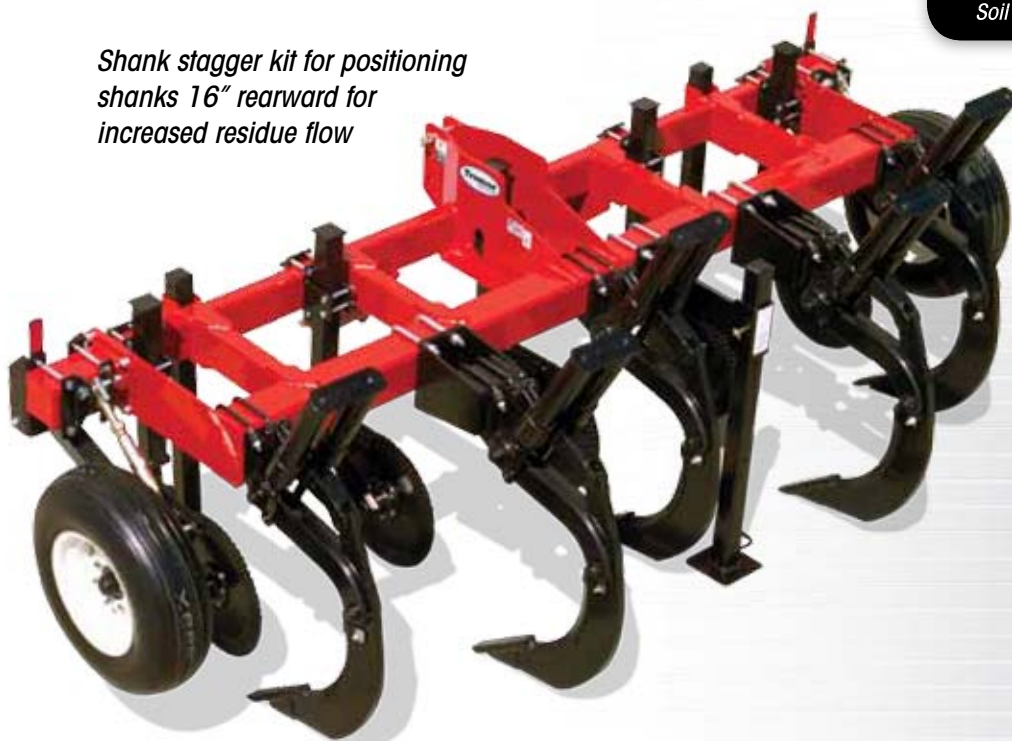

## Implement Caddy

The Implement Caddy's tractor-style, Category III 3-point hitch makes for easy, one-person hookup to virtually all 3-point equipment, including the Tremor subsoiler.

- Pull-through design with all-welded 4"x8" tubular steel frame for maximum strength
- Available in model 300 for up to 6-shank subsoilers, or model 500 for up to 9-shank implements
- Dual wheels with either 9.5L x 15 tires or 12.5 x 15 tires for greater flotation and enhanced durability
- More than 34 inches of vertical-lift travel for transport clearance
- Adjustable tongue height with combination clevis or single-tang hitch for easily matching your tractor
- 3,000 p.s.i. hydraulic cylinders for quickly raising and lowering the unit
- Choice of tractor red or green powder-coat finish for optimum corrosion resistance



Category III rear hitch

## Tremor Subsoiler Specifications

Requires 30–40 hp per shank; hp range determined from 14" working depth at 4 mph

Model size	Appx. HP Range*	Appx. Weight Auto-Reset Model 730	Appx. Weight Shear-Bolt Model 710	Transport Width
3 shank	90-120	2,395 lbs.	2,290 lbs.	8'
4 shank*	120-160	2,800 lbs.	2,660 lbs.	11'5"
5 shank*	150-200	3,310 lbs.	3,130 lbs.	13'10"
6 shank*	180-240	3,850 lbs.	3,655 lbs.	16'4"
7 shank*	210-280	4,350 lbs.	4,120 lbs.	19'2"
8 shank rigid*	240-320	4,745 lbs.	4,435 lbs.	21'2"
9 shank folding	270-360	6,510 lbs.	6,270 lbs.	16'5"

\*Reduce transport width approximately 3' when stabilizer wheels are positioned behind rear frame between two outer shanks.



For less aggressive subsoiling, look to the Zone-Builder® subsoiler

**Create an aftershock in your hardpan with the Tremor subsoiler. See your nearest Unverferth dealer today for complete details, check our website at [www.unverferth.com](http://www.unverferth.com) or call 1-800-322-6301.**

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice.



**Manufacturing Company, Inc.**  
P.O. Box 357 • Kalida, Ohio 45853  
(419) 532-3121 • FAX (419) 532-2468  
unverferth.com

**1-800-322-6301**

Please remind all family members and others to use caution and follow recommended safety practices when around all farm equipment. Unverferth Manufacturing Co., Inc., supports the efforts of Farm Safety 4 Just Kids and all other organizations that promote farm safety.

©2011 Unverferth Manufacturing Co., Inc. Printed in U.S.A.

®™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH

Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Oregon and Canada



UMRS1151205M7