



CREATE IDEAL  
PLANTING STRIPS WITH  
**CONSISTENT  
TILLAGE DEPTH!**

# RAPTOR

**STRIP-TILLAGE TOOL**



**STRIP TILLAGE**

**INNOVATING  
THE FUTURE OF  
AGRICULTURE**

MODELS 2130 AND 2115  
ST/LT/DT PULL-TYPE AND MT 3-POINT  
**UMEQUIP.COM**





# UNVERFERTH® **RAPTOR**

## STRIP-TILLAGE INTRODUCTION

The Unverferth Raptor® strip-tillage tool is built for growers looking to take advantage of the cost savings and yield benefits strip-tillage can provide. With less surface soil disturbance, strip tillage retains organic material, reduces erosion and conserves fuel by only tilling the strip that is planted into. The innovative folding design provides a narrow transport width so you can easily travel from field to field. The groundbreaking TerrainPro™2 row unit features the most consistent tillage depth and fertilizer placement from row to row for a ready-to-plant seedbed. Each row unit travels up and down independently from the others to follow field contours across the entire machine. The Raptor strip-tillage tool is available as a 16- or 12-row pull-type machine with dry (DT models), liquid (LT models) or no fertilizer (ST models) and also as a 3-point (MT models) tool with 12, 8 or 6 rows.



MODEL 2130DT PULL-TYPE

## ALL-IN-ONE SOLUTION

The Raptor strip-tillage tool provides an all-in-one solution for banding dry or liquid fertilizer! With custom-designed fertilizer systems developed by Unverferth, this is the ideal partner for delivering early-season fertility to your fields for boosting crop yields. The fertilizer tank is located behind the toolbar for enhanced operator visibility of the TerrainPro2 row units and for easier filling.



MODEL 2130LT PULL-TYPE

# TOOLBAR *FEATURES*

## PULL-TYPE TOOLBAR

- Pull-type models are available with a 16- or 12-row frame on 30" spacing.
- The heavy-duty 7" x 7" toolbar provides reliable operation, and the standard front-folding design with vertical-folding row units provide a narrow transport width for easy road travel.
- 15° of above and 5° of below horizontal wing flex allow the toolbar to follow uneven terrain.
- Wing gauge wheels feature stubble-guard tires for added stability and durability in the field.
- The standard hydraulic jack permits easy storage, while the CAT 4 or CAT 5 bull-pull hitch, transport chains and LED lighting provide safer road travel.
- ST models — 2130 and 2115 pull-type models without a fertilizer system, are standard with 380/90x46 single wheels and tires.



**MODEL  
2130ST**

## 3-POINT TOOLBAR

- 2130 and 2115 3-point mounted models are available with a 12-, 8- or 6-row frame on 30", 36" and 38" spacings.
- Heavy-duty double-wall frame with 6" x 6" rear mounting bar for maximum durability.
- Toolbar stabilizer wheels provide added stability in the field, and the tool-free adjustment permits quick and easy toolbar height adjustment.
- 3-point hitch design provides compact storage and greater maneuverability in the field.
- Optional flex frame kit for 12-row 36" and 38" models allows the wings to float 15° above and 5° below horizontal to follow field contours.
- Optional fertilizer shank attachments for delivering dry or liquid fertilizer.
- Optional rear hitch features length and height adjustment and can tow up to 14,000 lbs. gross vehicle weight and 1,000 lbs. of tongue weight.




**MODEL  
2115MT**





# TERRAINPRO2

## ROW UNIT

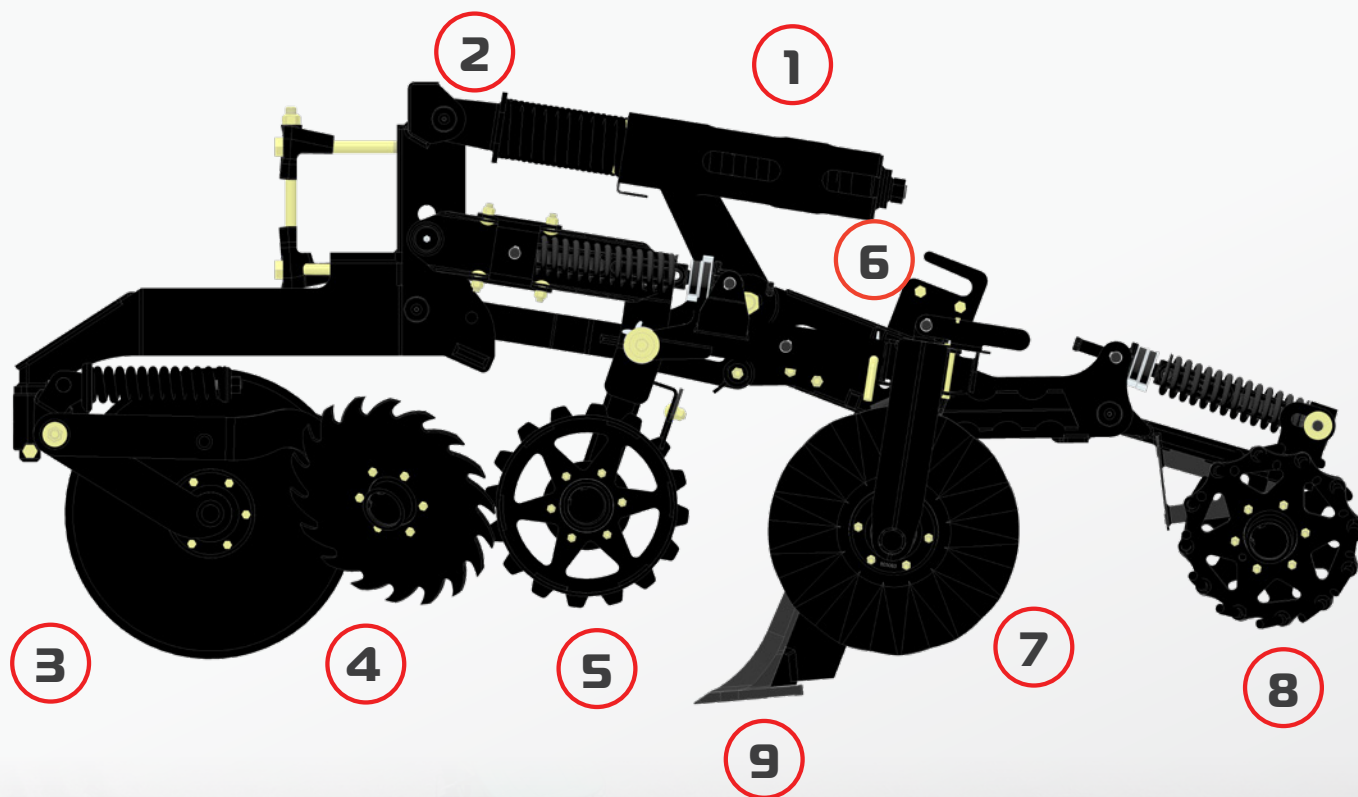

# TERRAINPRO2

## FEATURES

- 1 Choose from model 2130 with a spring-cushioned auto-reset shank trip mechanism that features 2,000 lbs. of point load pressure or model 2115 with a shear-bolt protected shank with 5,000 lbs. of shear pressure.
- 2 Each row unit features independent parallel linkage to free-float and follow field contours to ensure each shank runs at a consistent tillage depth from row to row, with 7" of upward travel and 4" of downward travel.
- 3 Lead coulter with 20" straight blade slices through residue to clear a path for the shank.
  - 1,500 lbs. of down pressure
  - 6-bolt greaseable hub with 5 layers of seal protection
- 4 Free-floating row cleaners follow ground contours and clear residue from the strip.
  - 16"-diameter shark-tooth row cleaner design with 6-bolt hubs prevents trash from wrapping
- 5 Independent row unit depth is maintained by the solid steel wheel with scraper for the most consistent shank depth from row to row.
- 6 Shank features tool-free height adjustment and can till from 4" to 10" deep to alleviate compaction.
  - Convenient depth gauge on each row allows the operator to quickly and conveniently adjust each shank to the same depth
  - Replaceable 2 1/4" cast point provides long-term, trouble-free use
  - Replaceable shank wear plates are standard to protect the sides of the shank in abrasive soils
- 7 Closing coulters with 17" wavy blades keep the soil in the path of the trailing basket for enhanced soil conditioning.
  - Each coulter floats independently from the other to keep constant ground contact through uneven ground
  - Tool-free adjustable spring down pressure combined with width and angle adjustments allows the operator to control the amount of soil being sent into the strip
  - 6-bolt hubs with triple-lip seals for maximum durability
- 8 11"-diameter crowfoot conditioning baskets break up clods, condition the strip, and feature a unique design where the fingers move closer together when contacting the ground to condition the soil and then separate at the top to wick away buildup.
  - Tool-free adjustable down pressure for increased or decreased soil conditioning
- 9 The optional strip freshener accessory can easily replace the shank and features 17" dual wavy coulter blades that revive the strip in the spring for a ready-to-plant seedbed. This can be operated at faster speeds and with both dry and liquid fertilizer application options, the strip freshener will help warm the strip, optimize spring nutrient placement and contribute to an even planting emergence. The strip freshener kit comes with a smaller 17" diameter lead coulter and rear basket shield to contain soil within the strip.



Strip Freshener





# DRY FERTILIZER SYSTEM

## DRY FERTILIZER SYSTEM

If you're looking to maximize crop yield, reduce your input costs and place nutrients right where the plant needs them, adding a dry or liquid fertilizer system to your strip-tillage operation is the right move. Unverferth is proud to offer an innovative strip-tillage tool and fertilizer application system for an all-in-one solution directly from one manufacturer.

Both the dry and liquid fertilizer systems are located behind the toolbar on pull-type models for better visibility of the row units when running in the field and also permit easy filling of the tank from behind the machine.

## DRY FERTILIZER SYSTEMS — MODELS 2130DT, 2115DT AND 4-TON CADDY

- High-flotation 380/90x46 dual wheels and tires where the inner set of tires are on 60" centers for increased flotation and added transport stability.
- 12-ton capacity with dual 6-ton or 4-ton single tank for the Raptor strip-tillage tool. Custom-molded poly tanks for applying 1 or 2 different products at the same time, each with variable rate.
- Raven RCM ISOBUS controller for viewing and controlling the system from the tractor's ISOBUS virtual terminal screen. This integrates with section control and preloaded field prescriptions.
- Standard scale package integrates with the ISOBUS controller for accurately tracking the amount of dry product applied and permits convenient rate calibration.
- Blockage monitors alert the operator when a row unit is plugged, 2-section control for each product, hydraulically powered high-output blower fan and 2 1/2" dry fertilizer plumbing hose.
- Ergonomic ladder and platform for easy access to the top of the tanks where there are LED spotlights for easier nighttime operation and weather-tight lids for protecting the dry product.

The single 4-ton fertilizer caddy easily attaches to 8- and 6-row 3-point mounted tools to create one-pass tilling and fertilizing. It can be equipped with a hose kit and blockage monitor, with an optional rear hitch for towing up to 4,000 lbs. of additional fertilizer.



Row blockage monitor



Single 4-ton fertilizer caddy

# LIQUID FERTILIZER SYSTEM

## LIQUID FERTILIZER SYSTEM — MODELS 2130LT AND 2115LT

- High-flotation 380/90x46 dual wheels and tires where the inner set of tires are on 60" centers for increased flotation and added transport stability.
- Custom-molded 1,200-gallon tank with 3" quick fill features a T-shaped design that holds the last 50 gallons of liquid in the sump to always maintain a primed pump, even on side hills.
- Raven RCM ISOBUS controller for viewing and controlling the system from the tractor's ISOBUS virtual terminal screen that integrates with section control and preloaded field prescriptions.
- Stainless-steel baffle inside the tank prevents the liquid from shifting back and forth abruptly, and the standard manual tank agitation valve keeps the liquid in proper suspension.
- Standard flow-ball monitors allow the operator to quickly and conveniently check the flow to each row.
- The liquid fertilizer system is powered by a hydraulically operated Ace 750 PWM pump, and the plumbing features 4-section control for added application versatility.
- Optional Ace 755 stainless-steel PWM pump in lieu of the standard pump provides added durability.
- Optional chemical inductor system lowers to the ground for easily adding micronutrients or stabilizer to the main tank.





# RAPTOR

## SPECIFICATIONS

### Pull-Type Raptor Specifications

Model		2130DT	2115DT	2130LT	2115LT	2130ST	2115ST
Fertilizer Attachment		Dry Fertilizer Cart		Liquid Fertilizer Cart		No Fertilizer	
Trip Mechanism		Auto-Reset	Shear-Bolt	Auto-Reset	Shear-Bolt	Auto-Reset	Shear-Bolt
Hitch		CAT 4 or CAT 5 Bull-Pull					
Size		16-Row/12-Row					
Row Spacing		30"					
Wing Flex Up		15°					
Wing Flex Down		5°					
Transport Width		13' 6"					
Transport Height		11' 10"		10' 4"		10' 4"	
Transport Length		44' 10"		44' 4"		38' 4"	
Hitch to Center of Axle (Tires)		35' 2"					
Approx. Empty Weight	16-Row	45,563 lbs.	33,200 lbs.	33,680 lbs.	31,375 lbs.	28,660 lbs.	26,355 lbs.
	12-Row	38,730 lbs.	30,040 lbs.	30,005 lbs.	28,215 lbs.	24,985 lbs.	23,195 lbs.
Approx. Empty Tongue Weight	16-Row	16,915 lbs.	12,410 lbs.	13,745 lbs.	12,590 lbs.	14,245 lbs.	13,095 lbs.
	12-Row	13,515 lbs.	10,830 lbs.	11,520 lbs.	11,010 lbs.	12,410 lbs.	11,515 lbs.
Approx. Loaded Tongue Weight	16-Row	11,160 lbs.	10,010 lbs.	12,470 lbs.	11,320 lbs.	–	
	12-Row	10,280 lbs.	9,385 lbs.	10,440 lbs.	9,925 lbs.	–	
Minimum H.P. Requirements (*30-35 H.P. Per Shank)		480*/360*					

### 3-Point Raptor Specifications

Model	2130MT	2115MT	2130MT	2115MT	2130MT	2115MT
Trip Mechanism	Auto-Reset	Shear-Bolt	Auto-Reset	Shear-Bolt	Auto-Reset	Shear-Bolt
Hitch	3-Point CAT 3 and CAT 4 Narrow					
Size	12-Row		8-Row		6-Row	
Row Spacing	30"/36"/38"					
Transport Width	14' 7"		14' 7"		17' 1"	
Approx. Empty Weight	14,305 lbs.	12,575 lbs.	10,125 lbs.	8,975 lbs.	6,870 lbs.	6,005 lbs.
Minimum H.P. Requirements (*30-35 H.P. Per Shank)	360*		240*		180*	

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice.



FOR COMPLETE DETAILS ON THE UNVERFERTH **RAPTOR STRIP-TILLAGE TOOL** → visit [UMequip.com](http://UMequip.com) or see your nearest dealer today.



RAP5251800M3

**Unverferth.**  
Manufacturing Company, Inc.

UNVERFERTH MFG. CO., INC.  
P.O. BOX 357, KALIDA, OH 45853, USA • [UNVERFERTH.COM](http://UNVERFERTH.COM) • 419.532.3121

© 2025 Unverferth Manufacturing Co., Inc.  
®, ™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc.  
Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Texas, Washington, and Ontario and Saskatchewan, Canada