



# 6-WHEEL ALL-WHEEL STEER FIELDRUNNER HEADER TRANSPORTS


## HIGH-VOLUME GRAIN HEADERS AND PLATFORMS



When the first Unverferth header transport debuted in 1988, 6- and 8-row heads were the norm and one size fit them all. Since that first model, Unverferth continually improved and evolved the header transports to dependably carry increasing sizes and styles with labor-saving features.

**In that tradition,** the new 6-wheel Unverferth header transport models with 6-wheel steering handles today's heavier heads and grain platforms with the stability and maneuverability you need.

- Available in 52', 48' and 42' models to match your needs
- Patent-pending 6-wheel steering provides easy trailing and tight 14' turning radius for easily maneuvering through fields and roadways
- Front axle-mounted suspension cushions the load over rough terrain and rolling fields
- Walking tandem rear axle with oscillating frame provides enhanced load stability through ditches and valleys

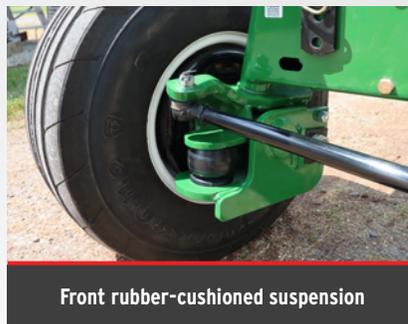

Front rubber-cushioned suspension



Walking tandem rear axle

## TRANSPORTATION

**INNOVATING  
THE FUTURE OF  
AGRICULTURE**

MODELS AWST-52, ASWT-48 AND AWST-42

**UMEQUIP.COM**

# UNVERFERTH HEADER TRANSPORT

- 4-wheel electric brakes, two front and two rearmost axles, for sure-footed stopping power and includes breakaway cable
- New high-capacity IF 320/65x15 wheels and tires dependably carry the load
- Patented tool-free adjustable rest brackets with tie downs for easily securing the load
- Available in red, green or black powder-coated finish that provides a long-lasting shine
- Standard 16' long tongue provides added clearance for header gauge wheels and other attachments. Optional 20' long tongue with built-in drop for greater convenience when towing behind combine
- Equipped with standard agricultural lighting with reflective striping and 7-pin connection with transport chain for safer road transport
- Optional adapter packages for securely carrying brand-specific style heads such as Claas Convio, Deere HD and MacDon FD2



4-wheel electric brakes



Tool-free adjustable rest brackets

## Unverferth FieldRunner AWS/AWSP Specifications

Model Number	AWST-52	AWST-48	AWST-42
Fits Conventional Grain Platforms	52' and smaller	48' and smaller	42' and smaller
Draper Platforms	52' and smaller	48' and smaller	42' and smaller
Corn Heads (30" Rows)	18-row and specialty	18-row and specialty	16-row and specialty
Carrying Capacity*	16,000 lbs.	16,000 lbs.	16,000 lbs.
Standard Tires	IF320/65x15	IF320/65x15	IF320/65x15
Approx. Weight (lbs.)	3,650	3,575	3,275
Tread Width	80"/90"	80"/90"	80"/90"
Approx. Overall Length - Std. Tongue	63'	59'	51'
Wheelbase	30'	30'	30'
Tongue Length (Std./Opt.)	16'/20'	16'/20'	16'/20'
Upper Support Tube Dimensions	8" x 4" x 52'	8" x 4" x 49'	8" x 4" x 43'
Maximum Height	4'3"	4'3"	4'3"
Minimum Height	2'6"	2'6"	2'6"
Rest Bracket Maximum Height	2'6"	2'6"	2'6"
Rest Bracket Minimum Height	2'4"	2'4"	2'4"
Span Between Upper/Lower Bar, Maximum	4'8"	4'8"	4'8"
Span Between Upper/Lower Bar, Minimum	2'5"	2'5"	2'5"

\*Carrying capacities are rated at agricultural speeds.



Optional 20' drop tongue



Optional JD hinged draper package

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice. For relevant patent marking, please visit [unverferth.com/patents](http://unverferth.com/patents).

FOR COMPLETE DETAILS ON THE UNVERFERTH HEADER TRANSPORTS → visit [UMequip.com](http://UMequip.com) or see your nearest dealer today.



AWST3281800M5

UNVERFERTH MFG. CO., INC.  
P.O. BOX 357, KALIDA, OH 45853, USA • [UNVERFERTH.COM](http://UNVERFERTH.COM) • 419.532.3121

**Unverferth**  
Manufacturing Company, Inc.

© 2023 Unverferth Manufacturing Co., Inc.  
®, ™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH  
Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Texas, Washington and Ontario and Saskatchewan, Canada